


PVC Flat 2 Core

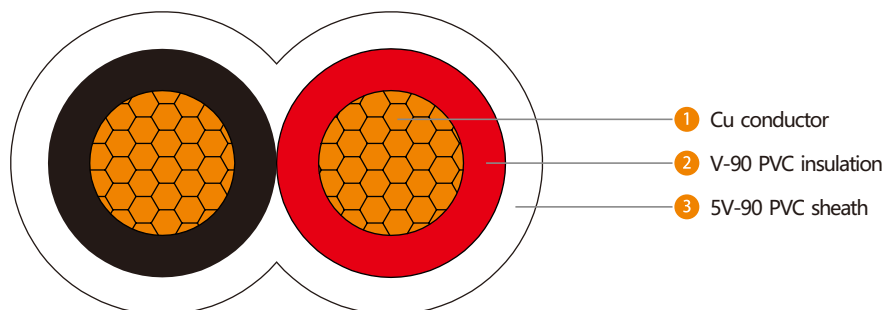

Properties:

Rated voltage	450/750V
Max. operating temperature of conductor:	90°C
Max. short-circuit operation temperature of conductor (5s Max. duration):	160°C
Min. temperature for installing without preheating:	+0°C
Standard	AS/NZS 5000.2
Can be supplied with a black sheath	

Structural Parameters:

Nominal conductor area mm ²	Number of cores	Approx. diameter of conductor mm	Conductor type	Nominal thickness of insulation mm	Nominal thickness of outer sheath mm	Approx. overall diameter of cable mm	Approx. weight of cable kg/km
1	2	1.3	Stranded Cu	0.6	0.9	4.5*7.1	51
1.5	2	1.5	Stranded Cu	0.6	0.9	4.7*7.7	64
2.5	2	2.0	Stranded Cu	0.7	1.0	5.6*9.2	94
4	2	2.5	Stranded Cu	0.8	1.1	6.5*10.8	137
6	2	3.1	Stranded Cu	0.8	1.1	7.1*11.9	180
10	2	4.1	Compact Cu	1.0	1.2	8.7*14.9	290
16	2	5.1	Compact Cu	1.0	1.3	9.9*17.2	421