


PVC/PVC/SWA/PVC Circular 2 Core & Earth

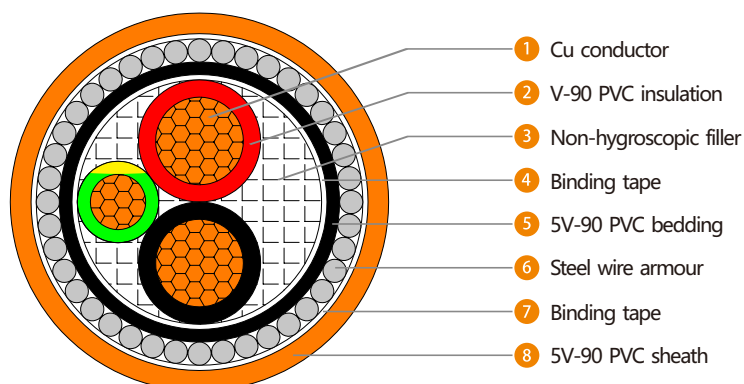

Properties:

Rated voltage	0.6/1kV
Max. operating temperature of conductor:	90°C
Max. short-circuit operation temperature of conductor (5s Max. duration):	160°C
Min. temperature for installing without preheating:	+0°C
Standard	AS/NZS 5000.1

Structural Parameters:

Nominal conductor area	Nominal earth conductor area	Approx. diameter of phase conductor	Conductor Type	Approx. diameter of earth conductor	Conductor Type	Nominal thickness of insulation of phase conductor	Nominal thickness of insulation of earth conductor	Nominal diameter over bedding	Nominal diameter over armour	Nominal thickness of outer sheath	Approx. overall diameter of cable	Approx. weight of cable
mm ²	mm ²	mm		mm		mm	mm	mm	mm	mm	mm	kg/km
1.5	1.5	1.5	Stranded Cu	1.5	Stranded Cu	0.8	0.8	9.5	11.1	1.8	17.1	379
2.5	2.5	2.0	Stranded Cu	2.0	Stranded Cu	0.8	0.8	10.6	12.2	1.8	18.2	445
4	2.5	2.5	Stranded Cu	2.0	Stranded Cu	1.0	0.8	12.0	13.6	1.8	19.6	534
6	2.5	3.1	Stranded Cu	2.0	Stranded Cu	1.0	0.8	13.1	15.6	1.8	22.0	740
10	4	3.8	Compact Cu	2.5	Stranded Cu	1.0	1.0	14.6	17.1	1.8	23.5	910
16	6	4.8	Compact Cu	3.1	Stranded Cu	1.0	1.0	16.5	19.0	1.8	25.5	1121
25	6	6.0	Compact Cu	3.1	Stranded Cu	1.2	1.0	19.6	22.8	1.8	29.3	1593
35	10	7.0	Compact Cu	3.8	Compact Cu	1.2	1.0	21.6	24.8	1.8	31.3	1909
50	16	8.1	Compact Cu	4.8	Compact Cu	1.4	1.0	24.6	27.8	1.9	34.5	2395
70	25	9.9	Compact Cu	6.0	Compact Cu	1.4	1.2	28.2	32.2	2.0	39.1	3311
95	25	11.5	Compact Cu	6.0	Compact Cu	1.6	1.2	32.8	36.8	2.2	44.1	4177
120	35	12.9	Compact Cu	7.0	Compact Cu	1.6	1.2	36.0	40.0	2.3	47.7	4962
150	50	14.4	Compact Cu	8.1	Compact Cu	1.8	1.4	39.7	44.7	2.4	52.9	6302
185	70	16.1	Compact Cu	9.9	Compact Cu	2.0	1.4	44.2	49.2	2.6	58.0	7647
240	95	18.4	Compact Cu	11.5	Compact Cu	2.2	1.6	49.6	54.6	2.8	64.1	9535
300	120	20.6	Compact Cu	12.9	Compact Cu	2.4	1.6	55.2	60.2	2.9	70.2	11467
400	120	23.4	Compact Cu	12.9	Compact Cu	2.6	1.6	62.1	67.1	3.2	78.1	13774