

Voice UTP

Keystone Jack

Product Description:

This insert works great to add a telecommunication connection into any room of the house office, it features dual colour-coded wiring labels with both T568A and T568B wiring pattern. A rear termination field for easy termination of a jack while installed in a wall plate, surface, mount boxes and blank patch panels for a wide variety of applications.

Technical Characteristics:

Available in telecommunication, T568 A/B wiring, meet or exceed TIA/EIA voice requirements.

Housing high temperature thermoplastic.

Compact jack design, 6 positions and 6 conductors.

Contact; phosphor bronze , phosphor bronze with MAX 50μ gold plate.

Accept 22-24 AWG solid with a insulation diameter of 0.4-0.6mm.


Easy to be terminated, low attenuation loss and high return loss.

High reliability and superior performance.

Available in different colours.



Voice Keystone Jack (RJ Port)

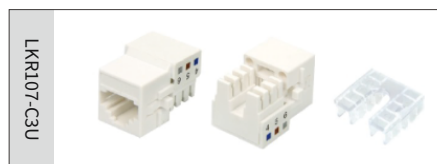

Voice Keystone Jack

Specification Parameter:

Part Number	Description	Standard Colour	Box Quantity	Carton Quantity	Carton Measurement	Carton Weight
LKR106-C3U	Voice Keystone Jack (RJ Port) (90 Degree)	White	25PCS	250PCS	L53.5cm×W31.3cm×H23.4cm	4.00kg
LKR107-C3U	Voice Keystone Jack (90 Degree)	White	25PCS	250PCS	L53.5cm×W31.3cm×H23.4cm	3.80kg