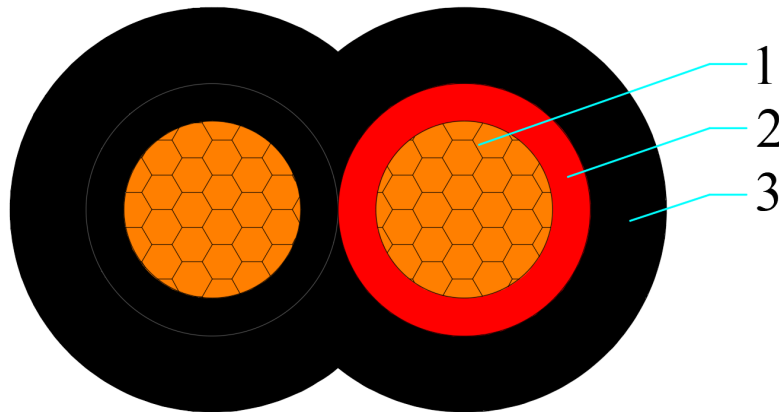


**0.6/1kV EQL**
**1. Design guidelines.**

AS/NZS 5000.1	Electric cables-Polymeric insulation Part 1: For working voltages up to and including 0.6/(1.2)1kV
AS/NZS 1125	Conductors in insulated electric cables and flexible cords
AS/NZS 3808	Insulating and sheathing materials for electric cables

**2. Application.**

Normal use operating temperature	90°C
Max. conductor temperature during short circuit(5s)	250°C
Lowest recommended temperature during installation	0°C

**3. Construction.**
**HCA - 16mm<sup>2</sup> x 2 core Cu/XLPE/PVC Flat 1kV - HCA8727EQL**


1	Conductor	Class 2, plain annealed circular compacted Copper conductor
2	Insulation	X-90
3	Outer sheath	5V-90 Black

**4. Core identification and mark as listed below, or as purchase order.**

Identification of core: Red, Black
Marking on cable: by printing in one line on the surface of outer sheath
HENG TONG CABLE AUSTRALIA "YEAR" ELECTRIC CABLE ENERGEX 358 0.6/1kV 16mm <sup>2</sup> 2 core Cu XLPE PVC Flat XXXXm



**TECHNICAL DATA SHEET  
HENGTONG CABLE AUSTRALIA**

Doc No.:  
GD/TC/4120001-2022

Rev:

Date: 4/25/2023

Page: 2 of 2

**0.6/1kV EQL**

**5. Construction parameters.**

Description	Unit	Values
<b>Active Conductor</b>		
Material	-	Copper
Nominal cross-sectional area	mm <sup>2</sup>	16
Conductor shape	/	Circular Stranded
Approx. diameter of active conductor	mm	5.1
<b>Active Insulation</b>		
Material	-	X-90
Nominal thickness/Min. thickness at any point	mm	0.7/0.53
Approx. diameter over insulation	mm	6.7
<b>Oversheath</b>		
Material	-	5V-90
Nominal thickness/Min. thickness at any point	mm	1.8/1.43
Approx. diameter of oversheath	mm	10.3x17.0
<b>Max. diameter of cable</b>	mm	12.3x19.0
<b>Approx. mass of cable</b>	kg/km	412
<b>Electrical data</b>		
Max. D.C. resistance of active conductor at 20°C	Ω/km	1.15
Max. A.C. resistance of conductor at 90°C	Ω/km	1.47
Fault current carrying capacity of conductor	kA/1sec	2.3
<b>Mechanical data</b>		
Maximum pulling tension of conductor	kN	2.18
Min. bending radius during installation	mm	62
Min. bending radius after installed	mm	41